



# Two

## Technical specifications

---

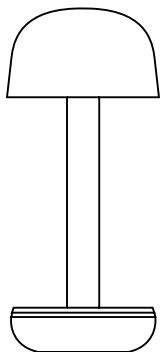

### Materials

Base – aluminum

Shade – aluminum, polycarbonate (PC), or linen

Seals – silicone

### Dimensions

Ø 8,8 x H 21,2 cm ( Ø 3.5 x H 8.3 inch)

### Weight

0,29 kg (0,64 lbs)

### Waterproof

IP65

### Country of Origin

China

### Light Source

G4 LED

### Power

<1 W, 3.7 V

### Color Temperature

2700 K

### Dimming

3 levels (Low > Medium > High)

### Light Output

Varies by shade material

### Control

Switch at the base

### Battery Capacity

2400 mAh

### Battery life

70 – 95 hours (low)

22 – 30 hours (medium)

12 – 17 hours (high)

### Charging

Wireless (Qi standard) or wired (USB-C)

### Charging Time

Wired up to 4 hours.

Wireless up to 6 hours with 10W adapter

### Adapter (not incl)

5V 2A (10W recommended), 5V 3A (15W max)

### Certifications



#### Radio Standards and RF Exposure

Model number:	HUMTL002XX
Radio frequency:	433
Emission frequency bands:	433 MHz
Reception frequency bands:	433 MHz
Channel bandwidth:	< 400 kHz
Possibility of choosing channels:	NO
Antenna (whether it is integrated or not):	NO
Apparent Radiated Power (PAR):	10 mW
Magnetic field level:	0.02 mT
Equivalent Isotropic Radiated Power (EIRP):	10 mW
Transmitter power:	10 m
Specific Absorption Rate (DAS):	433 MHz

# Two

## Light measurement report

---

### Tested light source

Type: DRUM LED G4  
Light output: 50 lm  
CCT: 2500 K  
CRI: 85  
Efficiency: 125 lm/W



### ALU SHADE

#### Measurements obtained

Light output: 17 lm  
Wattage: 0,45 W  
Efficiency: 38 lm/W



### LINEN SHADE

#### Measurements obtained


Light output: 17 lm  
Wattage: 0,45 W  
Efficiency: 38 lm/W




### FROSTED SHADE

#### Measurements obtained


Light output: 26 lm  
Wattage: 0,45 W  
Efficiency: 58 lm/W



Alu shade - Light Intensity distribution



Linen shade - Light Intensity distribution



Frosted shade - Light Intensity distribution

# Two

## Light measurement report

---

### Tested light source


Type: U filament G4  
Light output: 30 lm  
CCT: 2750 K  
CRI: 84  
Efficiency: 75 lm/W



### SMOKED SHADE

#### Measurements obtained

Light output: 6 lm  
Wattage: 0,45 W  
Efficiency: 13 lm/W



Smoked shade - Light Intensity distribution